


AIR TERMINATION RODS STEEL BASE MASTS, SEAM MASTS rod

H196024

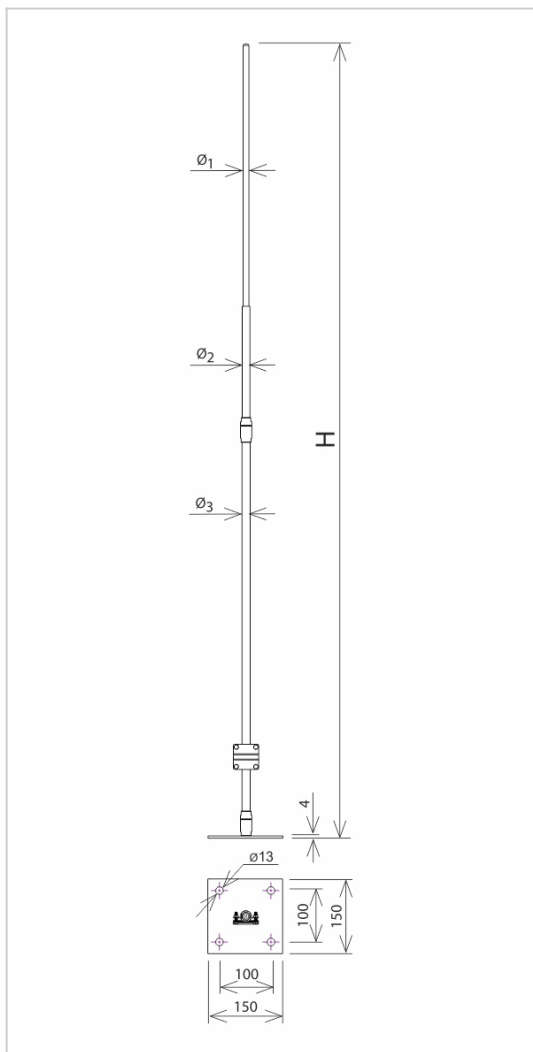

WERSJA MATERIAŁOWA:

hot galvanised steel

OPIS:

They are used to protect devices exposed to direct lightning current. They are always offered complete with accessories: lightning current discharge connector.

ASSEMBLY: by screwing the base of the mast to the substructure.

*F (kN) - minimum tensile load of the anchor

symbol typ	H196024 AN-80CS/OG/
H(mm)	2000
wind resistance(km/h)	195
F*(kN)	2
$\varnothing 1 / \varnothing 2 / \varnothing 3$(mm)	10 / 16 / ---
conductor(mm)	$\varnothing 8$
wersja materiałowa	hot galvanised steel



AN-KOM 2 Sp. z o.o.
Inwałd, ul. ks. Władysława
Bukowińskiego 15
34-120 Andrychów



an-kom.pl
sales@an-kom.pl



tel./fax
+48 605 527 132