


AIR TERMINATION RODS STEEL BASE MASTS, SEAM MASTS rod

H196056

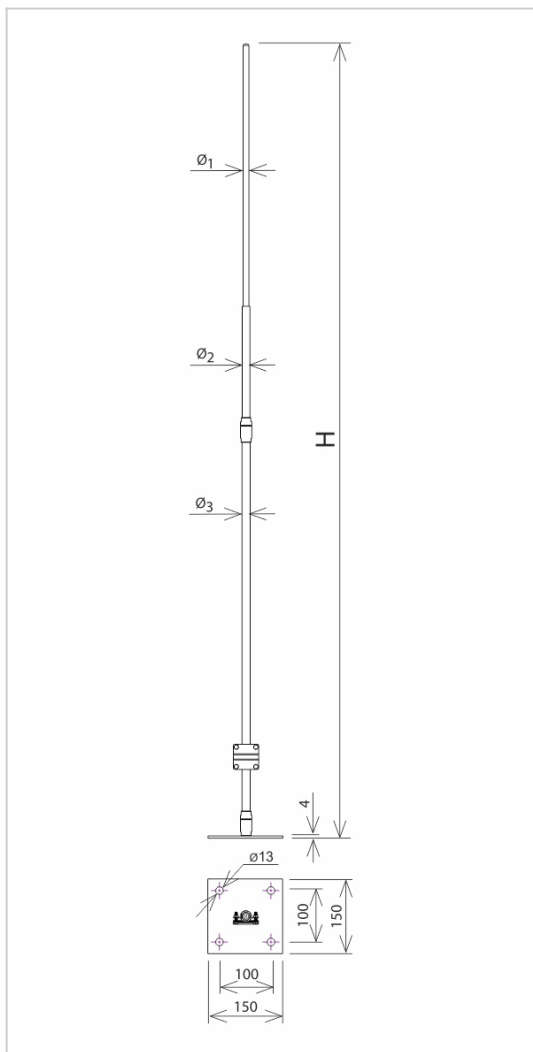

WERSJA MATERIAŁOWA:

hot galvanised steel

OPIS:

They are used to protect devices exposed to direct lightning current. They are always offered complete with accessories: lightning current discharge connector.

ASSEMBLY: by screwing the base of the mast to the substructure.

*F (kN) - minimum tensile load of the anchor

symbol typ	H196056 AN-80GS/OG/
H(mm)	4000
wind resistance(km/h)	184
F*(kN)	4
Ø1 / Ø2 / Ø3(mm)	10 / 16 / 18
conductor(mm)	Ø8
wersja materiałowa	hot galvanised steel



AN-KOM 2 Sp. z o.o.
Inwałd, ul. ks. Władysława
Bukowińskiego 15
34-120 Andrychów



an-kom.pl
sales@an-kom.pl



tel./fax
+48 605 527 132