


AIR TERMINATION RODS STEEL BASE MASTS, SEAM MASTS rod

H196064

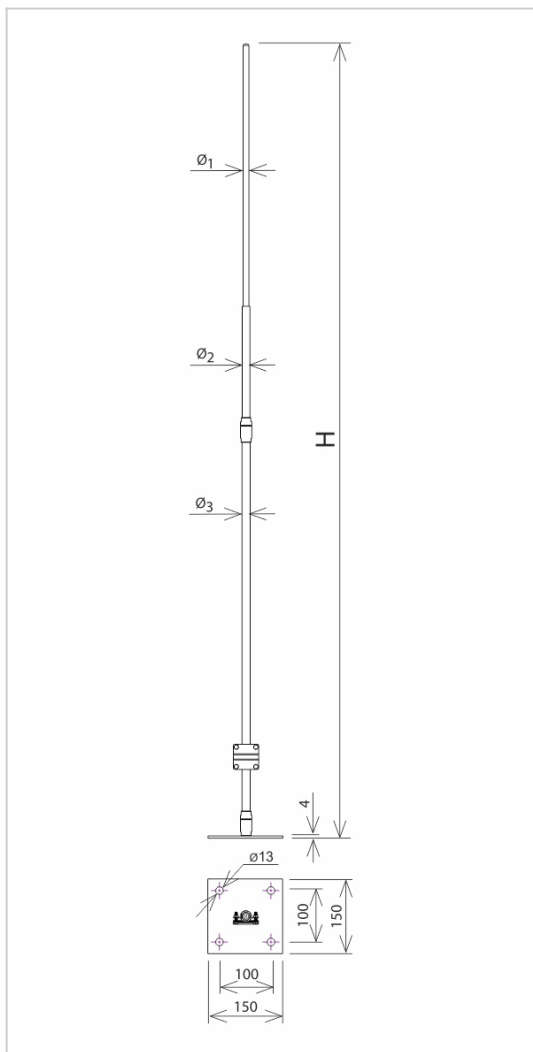

**WERSJA MATERIAŁOWA:**

hot galvanised steel

**OPIS:**

They are used to protect devices exposed to direct lightning current. They are always offered complete with accessories: lightning current discharge connector.

**ASSEMBLY:** by screwing the base of the mast to the substructure.

\*F (kN) - minimum tensile load of the anchor

<b>symbol</b> typ	<b>H196064</b> AN-80HS/OG/
<b>H(mm)</b>	2500
<b>wind resistance(km/h)</b>	209
<b>F*(kN)</b>	2
<b><math>\varnothing_1 / \varnothing_2 / \varnothing_3</math>(mm)</b>	10 / --- / 18
<b>conductor(mm)</b>	$\varnothing_8$
<b>wersja materiałowa</b>	hot galvanised steel



AN-KOM 2 Sp. z o.o.  
Inwałd, ul. ks. Władysława  
Bukowińskiego 15  
34-120 Andrychów



an-kom.pl  
sales@an-kom.pl



tel./fax  
+48 605 527 132