


AIR TERMINATION RODS CHIMNEY, RIDGE TILE AND PV SPIRES wall spires

H196196

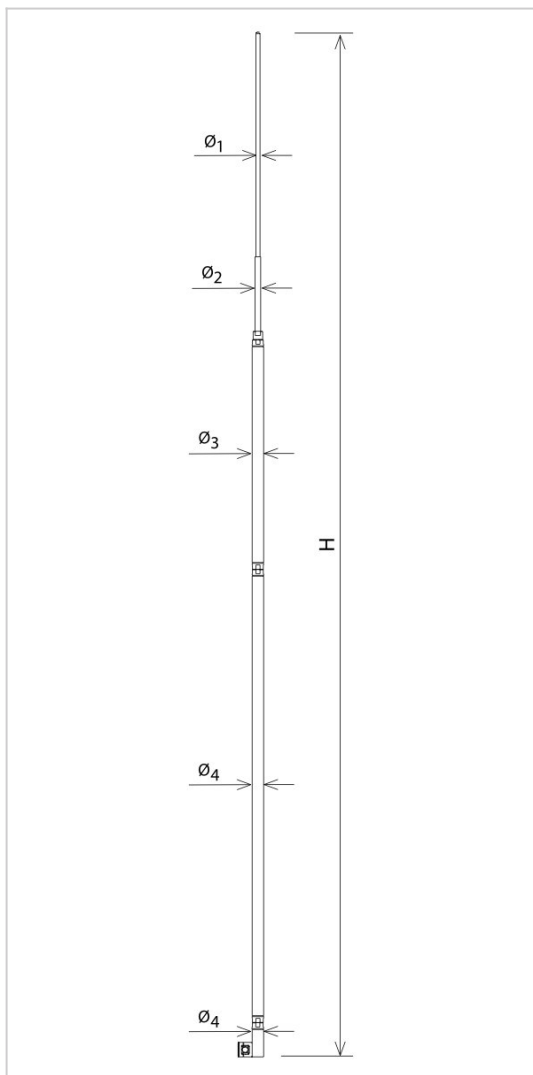

WERSJA MATERIAŁOWA:

hot galvanised steel

OPIS:

Lightning protection of a set of devices (ventilation and air conditioning units) located on the facilities. It is mounted with holders (ordered separately) directly to protected devices or railings.

*F (kN) - minimum tensile load of the base

symbol typ	H196196 AN-84C/OG/
H(mm)	6000
wind resistance(km/h)	174
F*(kN)	6
Ø1 / Ø2 / Ø3 / Ø4(mm)	10 / 16 / 33,7 / 33,7
cable dimension(mm)	Ø8
wersja materiałowa	hot galvanised steel



AN-KOM 2 Sp. z o.o.
Inwałd, ul. ks. Władysława
Bukowińskiego 15
34-120 Andrychów



an-kom.pl
sales@an-kom.pl



tel./fax
+48 605 527 132