


AIR TERMINATION RODS STEEL BASE MASTS, SEAM MASTS tubular

H196212

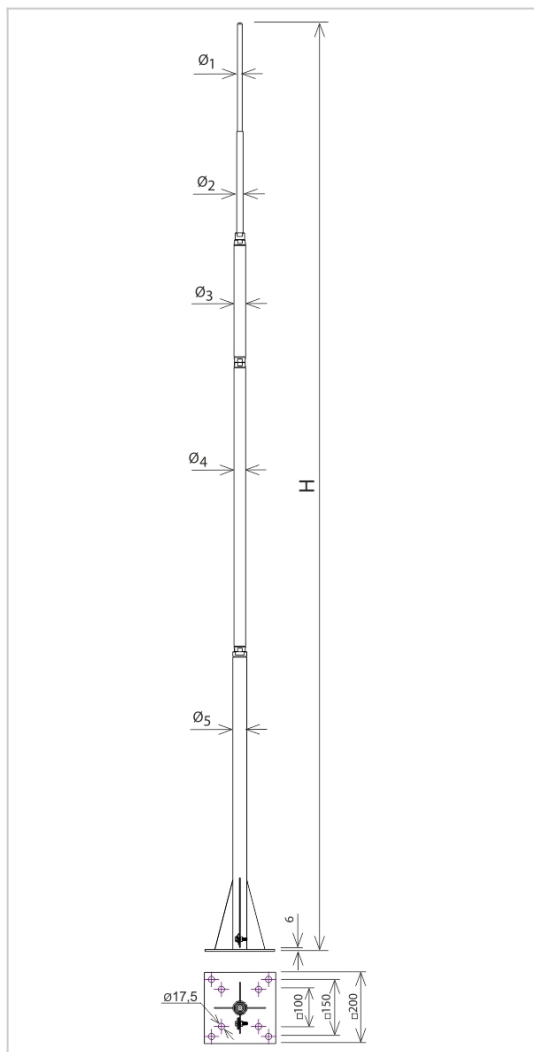

**WERSJA MATERIAŁOWA:**

hot galvanised steel

**OPIS:**

They are used to protect devices exposed to direct lightning current. They are always offered complete with accessories: lightning current discharge connector.

**ASSEMBLY:** by screwing the base of the mast to the substructure.

\*F (kN) - minimum tensile load of the anchor

<b>symbol</b> typ	<b>H196212</b> AN-86C/OG/
<b>H(mm)</b>	7000
<b>wind resistance(km/h)</b>	145
<b>F*(kN)</b>	12
<b>Ø1 / Ø2 / Ø3 / Ø4 / Ø5(mm)</b>	10 / 16 / 33,7 / 33,7 / 42,4
<b>conductor dimensions(mm)</b>	Ø8
<b>wersja materiałowa</b>	hot galvanised steel



AN-KOM 2 Sp. z o.o.  
Inwałd, ul. ks. Władysława  
Bukowińskiego 15  
34-120 Andrychów



an-kom.pl  
sales@an-kom.pl



tel./fax  
+48 605 527 132